



# Commercial Control Heads

Factory assembled, trim-to-length, with stainless steel solid wire innermember. Up to 3" travel, 5" min. bend radius and 20lb. pull load rating.


## Micro Adjust

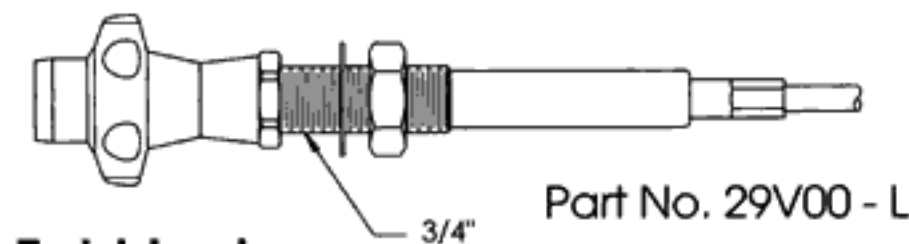

## Twist Lock

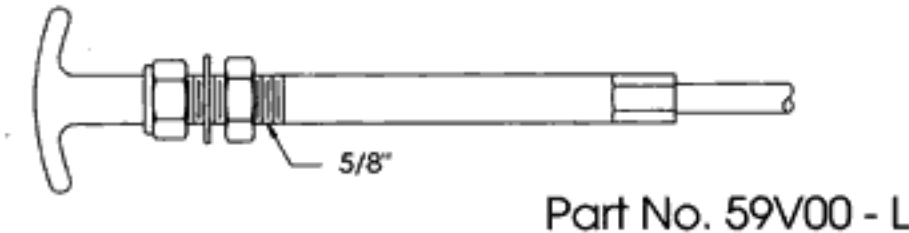


## Non-Lock - (Shown with 306 Knob)

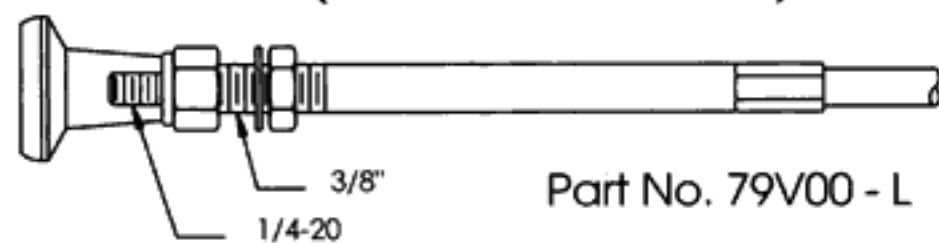


## Twist-On Conduit Ends

(Standard for Control Heads on left)




(Optional for Control Heads on left)

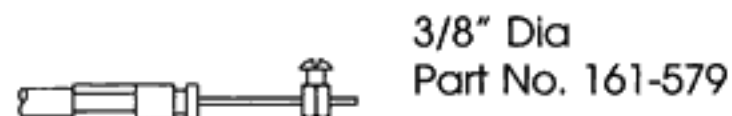


## Friction-Lock Kit

For Part No. 29V00. Includes adjustment ring and compression washer.

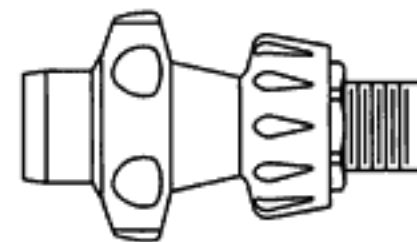

Part No. 165-510-215


## Truck Throttle Control

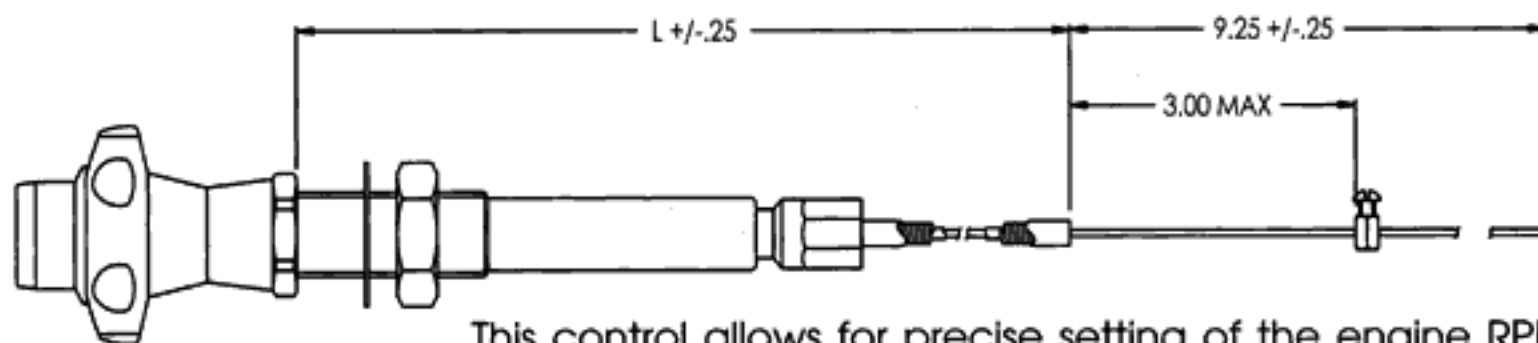

Part No. 286-009-L  
("L" = Length)

This control allows for precise setting of the engine RPM when the PTO is engaged or as a manual control of the idle position during engine warm up. (Friction lock optional)

## Non-Locking, Non-Rotating Control Head

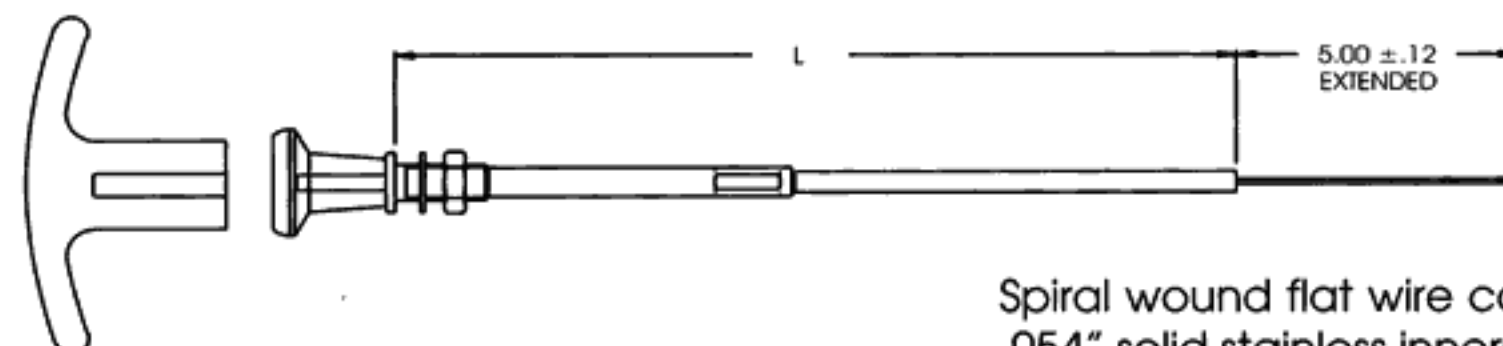

Spiral wound flat wire conduit  
.054" solid stainless innermember

Part No. 165-437-L Black Knob ("L" = Length)  
Part No. 165-438-L Black T-Handle ("L" = Length)